



Combined with valves  
covered by EN215

# R470

▶ 1.

▶ 1.

▶ 2.

▶ 2.

▶ 2.

▶ 4.

▶ 5.

▶ 7.

▶ 7.

▶ 8.



ISO 9001: 2000



R470

GIACOMINI

. R470



: 3/8", 1/2", 3/4"

PN 16

110°C

				Z (min)	W (K)
3/8"	R470	150 kg/h	0,858	26	1,42
1/2"	R470	150 kg/h	0,858		
3/4" (R401D-R401F)	R470	250 kg/h	0,950		
3/4" (R401D-R401F)	R470	250 kg/h	0,912	26	1,42
1/2" (R415)	R470	180 kg/h	0,796		

: 0.8

D -

: 0.85

Z -

:

W -


:

R452, R456, R470: 8°C

: 10 bar

: 1.4 bar (2/8", 1/2")

0,7 bar (3/4")

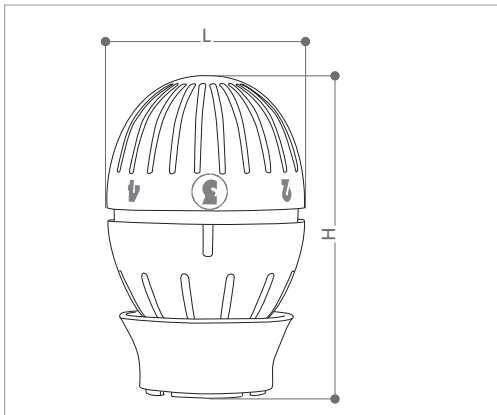

L	H
Ø48	75÷80



1.

(

)



CLIP  
CLAP®



## R470



2.

CLIP  
CLAP®



3.

CLIP  
CLAP®



4.

CLIP  
CLAP®

R470,

3

20°C,

3

20 °C

3 4.

2 3.

\*

8 °C .



	*	1	2	3	4	5	
°C	8	10	15	20	25	30	32



## R470



1.



2.



3.



4.



5.




6.







# R470

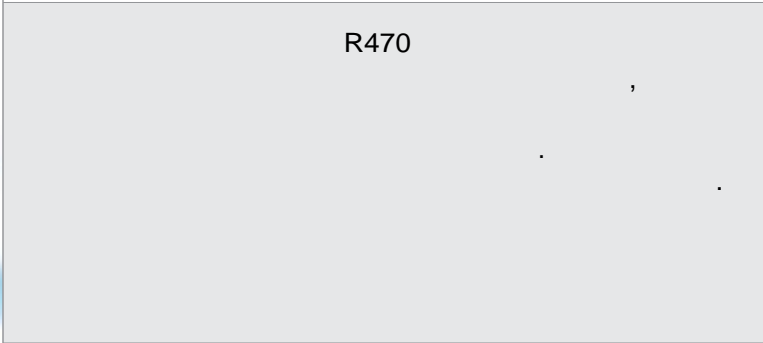

1 2 ( s-1 s-2 ) 3

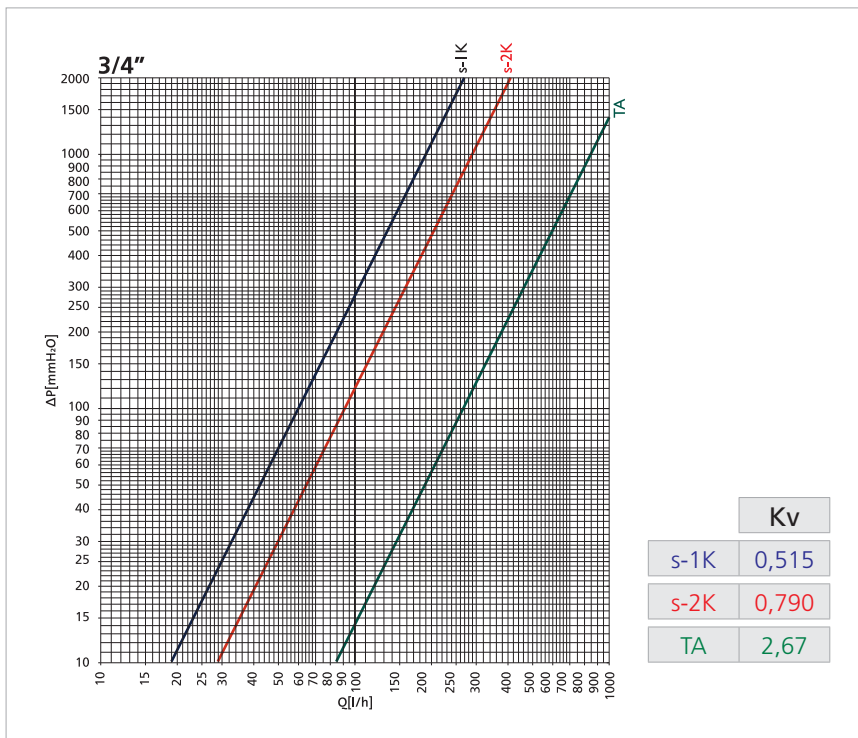

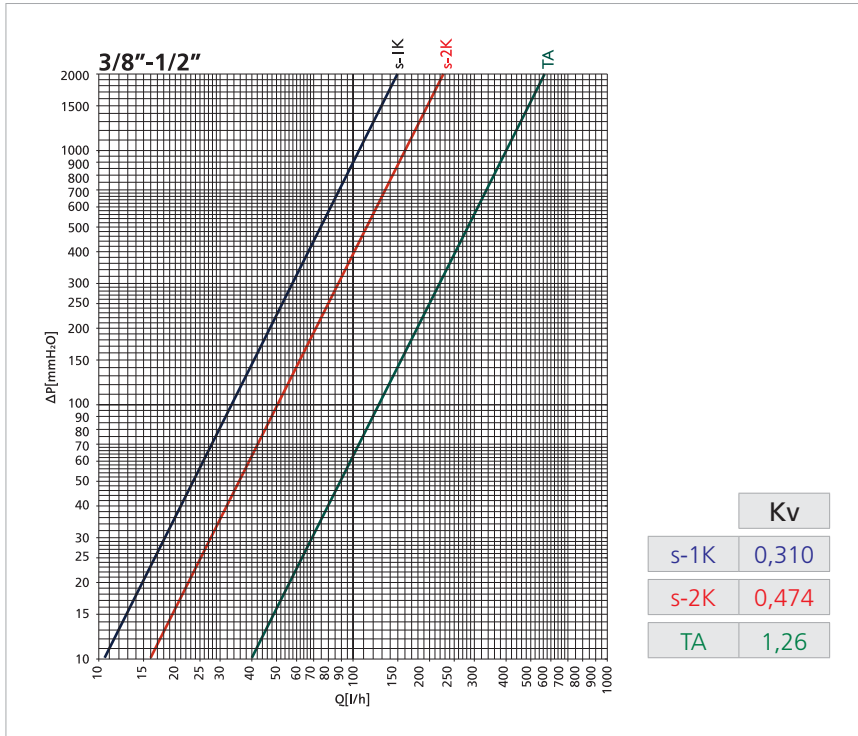

, CEN

EN 215



ISO 9001: 2000



R470



This technical communication has an indicative value. Giacomini S.p.A. has the right to make in anytime, without previous advice, modifications to the products contained in the present communication for technical or commercial reasons. Information reported in this technical communication does not free the user from scrupulously following the existing technical instructions. A reproduction, also partial, of the text is forbidden, except for previously written authorisation from the Management.



**GIACOMINI SPA**  
Via per Alzo,39  
28017 San Maurizio d'Opaglio (NO) ITALY  
tel. 0322 923111 - fax 0322 96256  
e-mail: [info@giacomini.com](mailto:info@giacomini.com)  
internet: [www.giacomini.com](http://www.giacomini.com)

1618

“ ”  
“ ” 253  
/ : 02 / 85 69 174  
.: +359 878 20 55 33  
[sales@terratherm-bg.com](mailto:sales@terratherm-bg.com)  
[www.terratherm-bg.com](http://www.terratherm-bg.com)